


PRECISION

ACOUSTICS

Hi-DEF SERIES



HD35T

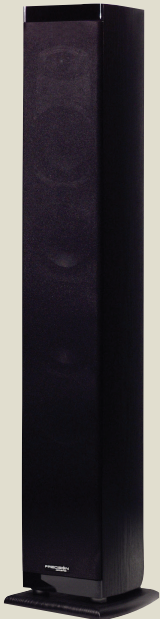

HD4M



HD12S

HD15S

Specifications

HD35T

3-Way Triple 5" Tower Loudspeaker

- Tweeter: 1" Polypropylene HD Soft Dome
- Woofer: Triple 5.25" Polypropylene HD Cone
- Frequency Response: 45Hz-20kHz
- Sensitivity: 92dB
- Nominal Impedance: 8 ohm
- Power Handling: 200 Watts
- Dimensions (HxWxD)-mm: 1040mm x 157mm x 220mm
- Dimensions (HxWxD)-Inches: 40.95" x 6.18" x 8.66"

HD4M

2-Way 4" Bookshelf Loudspeaker

- Tweeter: 1" Polypropylene HD Soft Dome
- Woofer: 4" Polypropylene HD Cone
- Frequency Response: 70Hz-20kHz
- Sensitivity: 88dB
- Nominal Impedance: 8 ohm
- Power Handling: 100 Watts
- Dimensions (HxWxD)-mm: 255mm x 134mm x 172mm
- Dimensions (HxWxD)-Inches: 10" x 5.28" x 6.77"

HD25C

2-Way Dual 5" Center Channel

- Tweeter: 1" Polypropylene HD Soft Dome
- Woofer: Dual 5.25" Polypropylene HD Cone
- Frequency Response: 48Hz-20kHz
- Sensitivity: 90dB
- Nominal Impedance: 8 ohm
- Power Handling: 150 watts
- Dimensions (HxWxD)-mm: 155mm x 150mm x 210mm
- Dimensions (HxWxD)-Inches: 6.1" x 5.91" x 8.27"

HD12S

12" 150 Watts Powered Subwoofer

- Woofer: 12" PolyHD Driver
- Amplifier Power: 150 Watts
- Frequency Response: 35Hz-150kHz
- Dimensions (HxWxD)-mm: 443 x 363 x 363mm
- Dimensions (HxWxD)-Inches: 17" x 14" x 14"

HD15S

15" 250 Watts Powered Subwoofer

- Woofer: 15" PolyHD Driver
- Amplifier Power: 250 Watts
- Frequency Response: 32Hz-150kHz
- Dimensions (HxWxD)-mm: N/A
- Dimensions (HxWxD)-Inches: N/A